


INSTALLATION INSTRUCTIONS

TECNORD PROPORTIONAL HYDRAULIC CONTROL VALVE

KIT REF: K/ACT/RFP/100

This kit contains:

| | | |
|---|---|-----------------|
| 1 | Proportional Control Valve | S/AC/500-4-030 |
| 1 | Solenoid Drive Lead (2m) | S/CB/500-1-045 |
| 4 | 3/4" BSP Male to 1/2" BSP Male Coupling | S/HY/500-9-045 |
| 4 | 3/4" Dowty Seal | S/HY/500-9-020 |
| 1 | Installation Instruction Sheet | S/DC/500-10-245 |

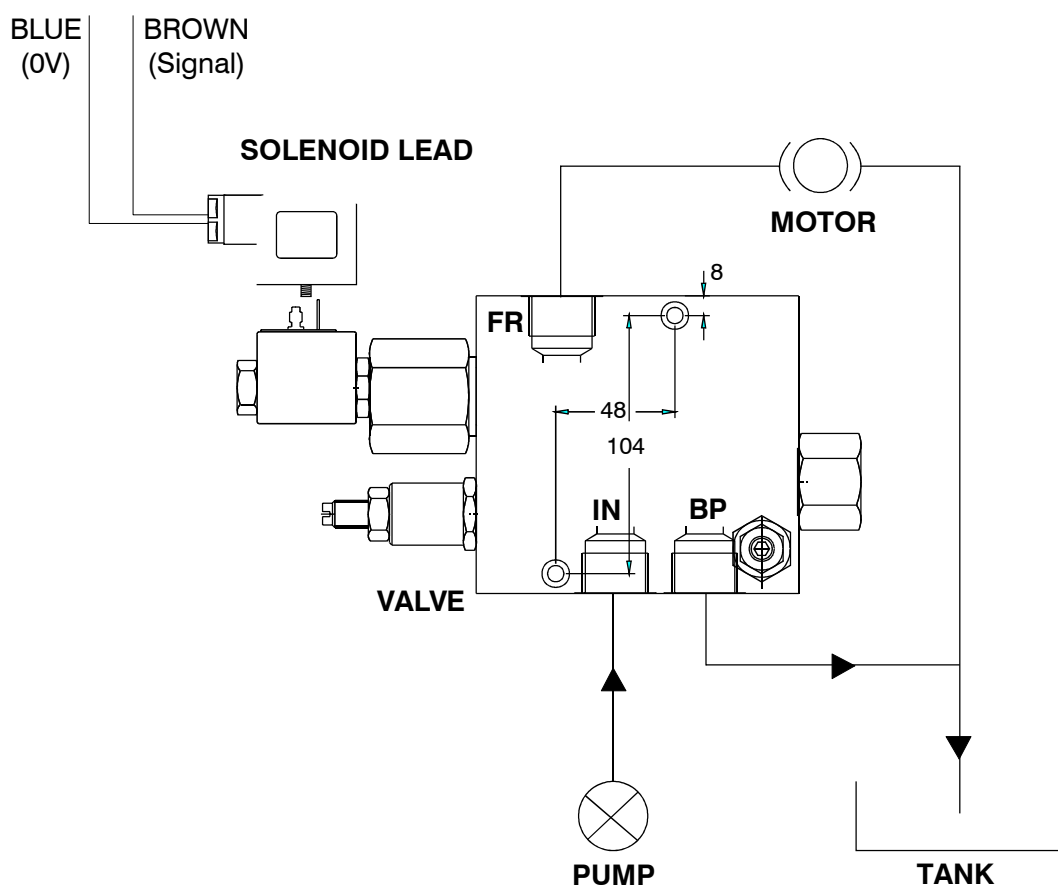

IMPORTANT: THOROUGHLY CLEAN AROUND THE HYDRAULIC CONNECTION POINTS TO AVOID ANY DIRT INGRESS DURING INSTALLATION.

Mount the valve block at a convenient position for the hydraulic connections using M6 x 60 (1/4" x 2-1/2") socket caphead screws (not supplied). Fit the BSP adaptor fittings using the Dowty Seals.

Connect the Solenoid Lead. Connect the brown wire to terminal PL2-8 and the blue wire to terminal PL2-2 in the junction box.

NOTE: If channel 2 of the Pro-Series is controlling the valve then connect the brown wire to terminal PL2-9.

RDS Technology Ltd, Cirencester Road, Minchinhampton, STROUD, Glos GL6 9BH UK